


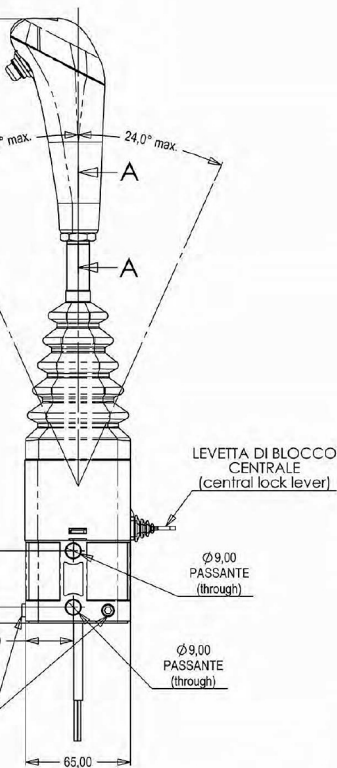

SEZIONE A-A
(section A-A)

INSERTO METALLICO
IMPUGNATURA
(metal insert of the knob)


N°2 GRANI PER
FISSAGGIO CAVI M8
(n°2 dowels for fixing cables M8)

LEVETTA DI BLOCCO
CENTRALE
(central lock lever)

Ø 9,00
PASSANTE
(through)


Ø 9,00
SSANTE

—DETTAGLIO SCALA 1 : 1
(detail scale 1 : 1)



POS. DI BLOCCO
(lock pos.)

POS. DI SBLOCCO
(unlock pos.)

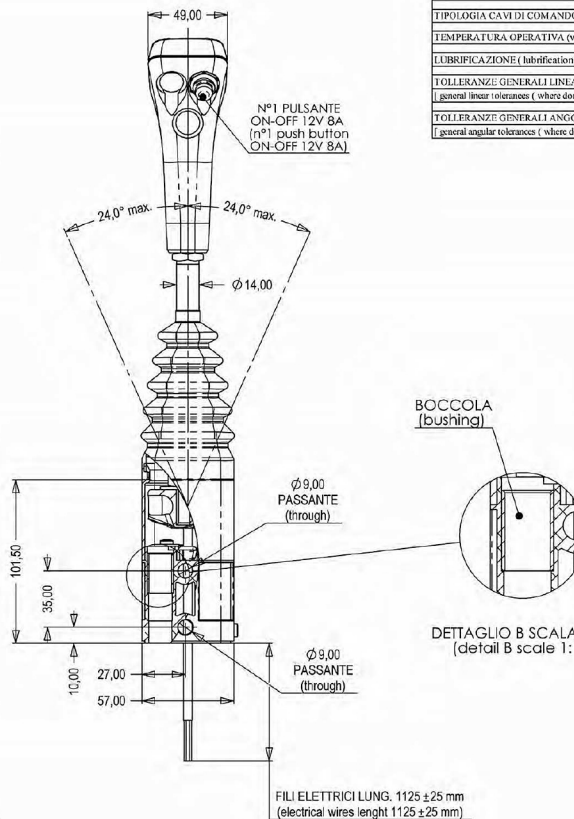

BOCCOLA
(bushing)

DETTAGLIO B SCALA 1 : 1
(detail B scale 1 : 1)



FILI ELETTRICI LUNG. 1125 ± 25 mm
(electrical wires lenght 1125 ± 25 mm)

COPIA AUTORIZZATA
(AUTHORIZED COPY)

Proprietà Industriale S.p.A.
Divisione di riproduzione in parte
e di rendimento a tutti.

Caratteristiche Generali (general specifications)	Valori (data)
CORSA TOT. MAX. (max.stroke)	141/14 mm
CARICO DI LAVORO MAX. SUI CAVO (working mass load on cable)	25 Kg
RAPPORTO DI LEVA (lever ratio)	7 : 1 8.5 : 1
SCHEMA DI COMANDO (system scheme)	MOVIMENTO A CROSS (cross movement)
BLOCCO IN POSIZIONE NEUTRA (neutral lock)	BLOCCO LATERALE (lateral lock)
TIPOLOGIA CAVI DI COMANDO (kind of control cable)	HEAVY DUTY
TEMPERATURA OPERATIVA (working temperature area)	-30° - +80° C
LUBRIFICAZIONE (lubrication)	MolKose G72
TOLLERANZE GENERALI LINEARI (Dove non indicate): FINO A 100 ± 0,15 OLTRE ± 0,15 % (general linear tolerances (where don't indicate): until 100 ± 0,15 over ± 0,15 %)	
TOLLERANZE GENERALI ANGOLARI (Dove non indicate): ± 0,5° (general angular tolerances (where don't indicate): ± 0,5°)	

SCHEMA ELETTRICO
(electrical scheme)



VISTA ISOMETRICA
(isometric view)

[illegible]